ADVANTAGES:

- EASY INSTALLATION
- EXCELLENT FOR HIDING AND EQUIPMENT
- ALWAYS A FLAT PAVING AND EASILY ACCESSIBLE
- EXCELLENT ABSORPTION OF STRUCTURAL MOVEMENT
- BETTER ACOUSTIC INSULATION
- HIGHLY RESISTANCE
- SIGNIFICANT LESS WEIGHT

ADJUSTABLE HEIGHT: We have a solution height from 1/8" to 50".

MATERIAL: 20% Talc-lled Polypropylene and rubber

ENVIROMENTAL IMPACT: Reusable and recyclable - Non-hazardous waste

APLICATION:

On any waterproong membrane, rigid insulation panel, solid and compact surface.

MECHANICAL TESTS:

Compression tests after articial aging showed the pedestals maintained structural integrity and load-bearing capacity even after undergoing aging cycles.


CHEMICAL TESTS:

Resistance to de-icing salts: Pedestals were tested to assess durability against salts used for ice melting. Chlorine resistance: Tested for stability when exposed to chlorine, simulating conditions near swimming pools. Frost-defrost cycles: Examined the eects of repeated freezing and thawing on the pedestals. Immersion in hydrocarbons: Tested for durability when submerged in substances like petrol and diesel.

FIX COLLAR: Fix and lock height after adjustment, increase stability SHIM: Anti-slip, reduce impact, absorb shock, compensate floor thickness difference.





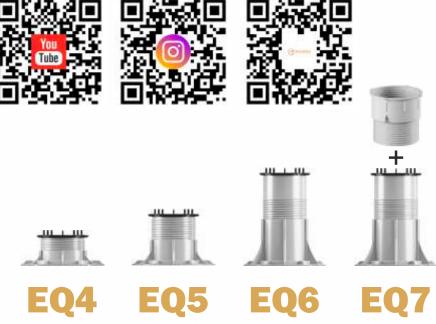



AVERS

ADJUSTABLE PEDESTALS



www.ntpavers.com







www.ntpavers.com

ADVANTAGES:

NT



Excellent for hiding equipment



Excellent absorption of structural movement



High resistance



Quick water drainage



Always a flat paving and easily accesible




Better acoustic insulation



Significantly lightweight









2 3/4" - 5"





All and the second seco



1



Power Key Ambientata T

LOADING CAPACITY	COMPOSITION	LOADING CAPACITY	COMPOSITION
2743	Base Diameter 8,07 in Head Diameter 5,12 in	2621	Base Diameter 8,07 in Head Diameter 5,12 in



Red EQ Slope Adjuster







EQ Lucky Shims



XI XI





WIND-UP LIFT SYSTEM



RAIL SYSTEM





SHOCK PROOF STICKER

RISE-IT




Rise-it Flat Top



Rise-it with shim 9/16"



Rise-it 1/8"



Risers can be stacked 3 pcs high with an elevation of 1/2" increments. Up to 4 shims can be used in conjunction in 1/16" increments for optimal levelling.

