



DATA SHEET

MINI MODULAR

PATTERN

PORCELAIN PAVERS


TECHNICAL DETAILS

- 1. Thickness:** 3/4" (20 millimeters)
- 2. Solar Reflectance Index Range:**
- 3. Grip:** R11 (per DIN 51130)
- 4. Frost Resistance:** Compliant with EN ISO 10545-12.
- 5. Surface Hardness (Mohs):** 8 (per UNI EN 101).
- 6. Resistance to Deep Abrasion:** $\leq 175 \text{ mm}^3$ (per EN ISO 10545-6).
- 7. Resistance to Staining:** Conforms to standards.
- 8. Bending Strength/Breaking Strength:** $\geq 45 \text{ N/mm}^2$.
- 9. Water Absorption:** $\leq 0.2\%$ (per EN ISO 10545-3).

PACKAGING DETAILS

- 12"x24":** 1 pallet = 240 sqft (3 pcs/box)
18"x36": 1 pallet = 243 sqft (2 pcs/box)
24"x24": 1 pallet = 240 sqft (2 pcs/box)

AVAILABLE COLORS

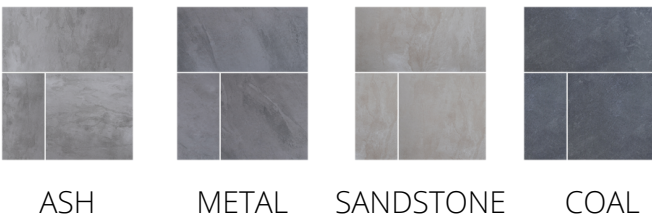

FEATURES

Porcelain pavers are low maintenance, resistant to stains, and easy to clean. They are also known for their resistance to frost and thermal shock. Ideal for outdoor spaces, these pavers are often used for patios, walkways, pool decks, and terraces. Their durability makes them suitable for both residential and commercial projects.

AVAILABLE SIZES

18"x36"	45x90 cm (approximately 17.7x35.4 inches)
24"x24"	60x60 cm (approximately 23.6x23.6 inches)
12"x24"	30x60 cm (approximately 11.8x23.6 inches)

AVAILABLE PATTERNS

